


FloorBridge® SLX 15/10

Carbon Composite floorjoint profile with an off-center sine curve for wider kerfs and contraction joints.



corresponds to
2002/44/EC EU
Vibration Directive

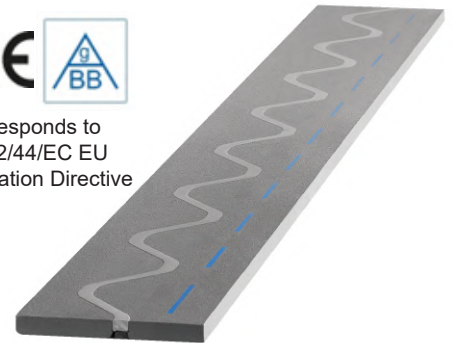

- ◆ Width of joint profile: ca. 130 mm
 - ◆ Length of joint profile: ca. 1.200 mm installed (1.195 mm netto)
 - ◆ Thickness of joint profile: ca. 15 mm
 - ◆ Joint width in substrate: max. 10 mm
 - ◆ Contamination seal: ca. 10 mm
 - ◆ Total horizontal joint movement: 8 mm (-3/+5 mm)
 - ◆ Grindable: max. 2 mm
 - ◆ Compressive strength: 60 N/mm² (ONR 23303)
 - ◆ Load: corresponds to forklift class FL6 - axle load 170 kN (DIN EN 1991-1-1)
 - ◆ Fire classification: Bfl-s1
 - ◆ Colour: grey
 - ◆ Packaging: 168 pcs. a 1,2 m / euro-pallet
- suitable protective foil: SF11

